

Narrow weaving machines

2021 Catalogue



Quality is produced, not controlled!

SanTEKS
TEXTILE MACHINERY

About us

Santeks Tekstil Makineleri İth. İhr. Ltd. Şti. started its business in 2003 with the principle “providing world standard products to its customers producing/providing the state of the art/modern technology textile machinery” has become a company elaborating the principle of highest customer satisfaction which provides the best technical services to all textile manufacturers in Turkey from the smallest to the biggest.

Santeks Textile Machinery, which opened its first overseas office in Uzbekistan / Tashkent in 2008, exports to many countries, especially Uzbekistan. It has acquired Boosan brand in 2017. Our efforts to respond the demands from North Africa is going on with our offices opened in Algeria in 2018 and Tunisia in 2019. Since the day it was founded, our company has drawn many textile machinery projects and has established a production line and has become a reliable brand in the countries where it operates.

It continues its operations with the motto “**quality is produced not controlled**”.

Our brands




Our certificates



Quality is produced, not controlled!

JYNFJ

Series of jacquard needle loom

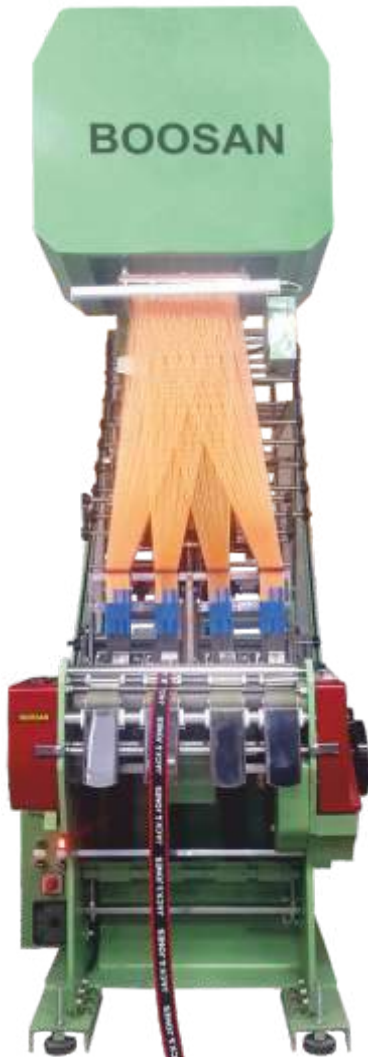

JYFN5J 2 4/65

Jacquard needle loom



JYNFJ 6/42

Jacquard needle loom

Optimally and flexibly used in the weaving of various kinds of elastic jacquard tapes and etc. Equipped with take off roller made of rubber or metal on require.

Model (Single hook single weft)	8/27	10/27			6/50	8/50	4/65	6/65	2/135	2/165	4/65	6/45	8/27
Model (Double hooks double weft)	8/27	10/27	6/42	8/42									
Weaving head	8	10	6	8	6	8	4	6	2	2	4	6	8
Weaving head width	27	27	42	42	50	50	65	65	135	165	65	45	27
Number of Frame	12	12	12	12	12	12	12	12	---				
Jacquard Hooks	128 / 192 / 240		128/192/240/384		128/192/320/448		192/240/320/384/448/512/640		---				
Motor	2 HP				3 HP				---				
Pattern Chain Cycle	1:32								---				

JYNFJ

Series of jacquard needle loom

JYNFJ 6/45

Weft jacquard



JYNFJ 6/42-320

320 Hooks double crochet doubleweft double roller



Website
www.santeksmakine.com



E-Mail Address
info@santeksmakine.com



Call Center
+90 212 556 05 76 pbx

JYF5J

Series of jacquard needle loom



JYF5J 8/55

Jacquard needle loom

Optimally and flexibly used in the weaving of various kinds of elastic and non-elastic jacquard tapes and etc.

Equipped with take off roller made of rubber or metal as required.



JYF5J 8/55

Jacquard needle loom

JYF5J 2/110

Jacquard needle loom

Model	10/27	12/27	8/30	10/30	8/35	10/35	6/45	8/45	10/42	8/55	6/60	4/70	4/90	4/110	2/110	2/130	
Weaving head	10	12	8	10	8	10	6	8	10	8	6	4	4	4	2	2	
Weaving head width	27	27	30	30	35	35	45	45	42	55	60	70	90	110	110	130	
Roller	Single roller / Double roller									Double roller							
Number of frame	According to jacquard hooks									According to jacquard hooks							
Jacquard hooks	128 / 192 / 240				128 192 / 240 / 320 / 384 / 448						128/192/240/320/384/448/512				192/240/320/384/512/640/768/864		
Weft density	3.5 ~ 36.7 cm (8.9" ~ 93" inch)																
Motor	2 HP																
Pattern chain cycle	1:40																



■ JYNF6/42 - Needle loom

Optimally and flexibly used in the weaving of various kinds of elastic and non-elastic tapes and aiguillette, lace and etc.

Higher speed, better performance and etc.



■ JYF5 6/45 - High speed needle loom

It is used in the most convenient and flexible way to touch various elastic and non-elastic tape and similar materials.

Model (Single hook single weft)	8/27	10/27			6/50	8/50	4/65	6/65	2/135	2/165	4/65	6/45	8/27
Model (Double hooks double weft)	8/27	10/27	6/45	8/42									
Weaving head	8	10	6	8	6	8	4	6	2	2	4	6	8
Weaving head width	27	27	45	42	50	50	65	65	135	165	65	45	27
Roller	Single roller							---					
Jacquard hooks	20							---					
Weft density	3.5 ~ 36.7 cm (8.9" ~ 93" inch)							---					
Motor	2 HP							---					
Pattern chain cycle	1:8 1:48							---					

JYF5

Series of needle loom



■ JYF5 8/55 - Double roller needle loom

Optimally and flexibly used in the weaving non-elastic tapes and aiguillette, lace and of various kinds of elastic and etc. Higher speed, better performance and etc.



■ JYF5 10/27 High speed needle loom

Model (Single hook single weft)	8/27	10/27			6/50	8/50	4/65	6/65	14/20	12/27	10/30	10/35	8/45	8/55	4/110
Model (Double hooks double weft)	8/27	10/27	6/45	8/42											
Weaving head	8	10	6	8	6	8	4	6	14	12	10	10	8	8	4
Weaving head width	27	27	45	42	50	50	65	65	20	27	30	35	45	55	110
Number of frame	20								---						
Roller	Single roller								Single roller		Single roller / Double roller				
Jacquard hooks	---								Standart configuration: Single curl 16", double curl 14"						
Weft density	3.5 ~ 36.7 cm (8.9" ~ 93" inch)														
Motor	2 HP														
Pattern chain cycle	1:8							1:48							



■ JYW 400/APS Spandex warping machine (Neating machine)



■ JYW 400/AP (84) Warping machine


Model	60	72	84	96	JYW400/AP	JYW450/AP
Performance	2 sets yarn breaking and stopping device 1 set infrared control yarn breaking and stopping device 1 set yarn breaking and warp stopping sheet				---	
Specifications	---				Apply to beam under 400 mm Axis core diameter of beam > 110 mm	Apply to beam under 450 mm Axis core diameter of beam > 125 mm
Speed adjustment	Frequency control: 0 ~ 350 r/min (Line speed 0 ~ 390 m/min)					
Set length	Use the counter to set any warp lenght according to the requirement, this measure can reducethe loos of warp					
Widthand density adjustment	Adopt 4 pieces of W-reed; adjust width and the left and right device randomly					
Motor	2HP / 4P / 380 V / 3 Phase					



Optimally and flexibly used in the weaving of various kinds of hanging ribbon narrow fabrics.

Durable, high speed, mute, easy operation, convenient maintenance and etc.

Model	JYS5-4/80	JYS5-4/90	JYS5-6/55	JYS5-4/60	JYS5-8/35	JYS5-10/27	JYS5-2/110	JYS5-2/130	JYS6/55
Weaving head	4	4	6	4	8	10	2	2	6
Weaving head width	80	90	55	60	35	27	110	130	55
Number of frame	8	8	8	8	8	8	8	8	8
Weft density (cm)	2.8 ~ 3.2/cm		2.6 ~ 3.0/cm				2.8 ~ 3.2/cm		2.6 ~ 3.0
Pattern chain cycle	Cam 1:8								

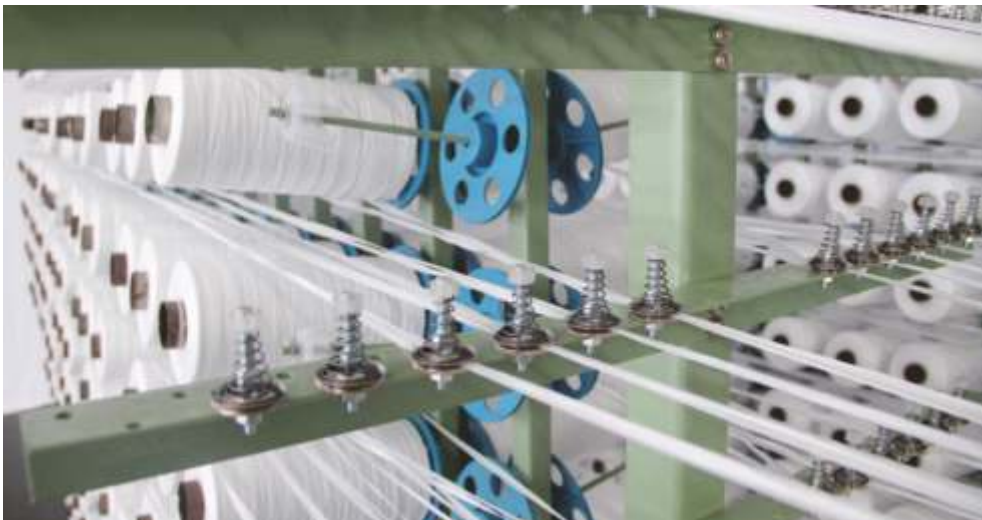

JYC

Series of crochet machine

**JYC**

762/B3 Crochet machine

**JYC**

610/B8 Crochet machine

Model	JYC 610/B8	JYC 610/B8	JYC 610/B8	
Operation space	24" inch (609 mm)	30" inch (762 mm)		
Weft bars	8	3	8	
Gauge	15 / 20	12 / 13 / 14 / 15 / 20		15 / 20
Motor	1.5 HP (1 Unit)	1.5 HP		1.5 HP
Speed	- - -	(Max. idle speed) 1.500 r/min		
Weaving width / Number	- - -	80 cm / 60	1.5 cm / 40	2 cm / 30 ~ 32
	- - -	2.5 cm / 24 ~ 26	3.2 cm / 20	4 cm / 16
	- - -	6 cm / 10 ~11	7.5 cm / 8 ~ 9	8 cm / 8
Standard equipment	2 HP Inverter (1 Set)	2 HP Inverter Choose		2 HP Inverter
	Rubber feeding device (2 Sets)	2 Sets rubber feeding device		
	Auto stop motion system (2 Sets)	Auto stop motion system		
	Warp and weft reed (1 Set)	Warp and weft reed		
	Auto weft sending	- - -		
	Finish product collection device (1 Set)	- - -		
Machine Size (Packing Means) cm	188 x 111 x 210	180 x 100 x 180		200 x 100 x 180

JYG

Series of crochet machine




JYG
Crochet machine



JYC
762/B8 Crochet machine



JYG
612/B8A Crochet machine

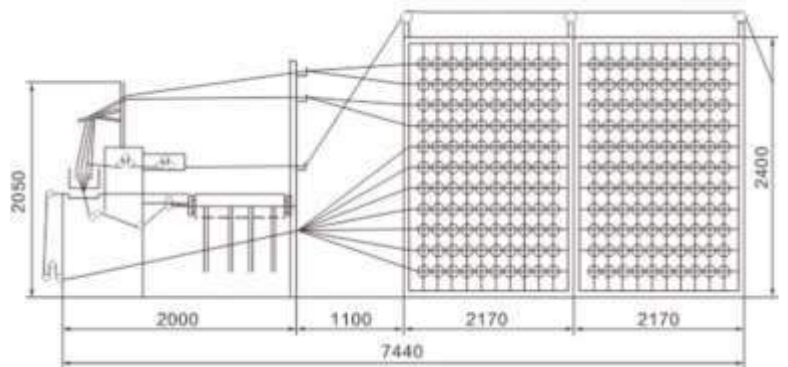

Model	612/B11	612/B8	612/B8(A)	612/B3	762/B3	762/B8
Operation space	24" inch (609 mm)				30" inch (762 mm)	
Weft bars	11	8	8	3	3	8
Gauge	15 / 20		12 / 13 / 14 / 15 / 20		15 / 20	
Motor	1.5 HP					
Speed	- - -				(Max. idle speed) 1.500 r/min	
Weaving width / Number	- - -		- - -		80 cm / 60	1.5 cm / 40
	- - -		- - -		2.5cm / 24~26	3.2 cm / 20
	- - -		- - -		6cm / 10~11	7.5cm / 8~9
Standard equipment	2 HP Inverter Choose		2 HP Inverter		2 HP Inverter Choose	2 HP Inverter
	Rubber feeding device (2 Sets)				2 Sets rubber feeding device	
	Auto stop motion system (2 Sets)				Auto stop motion system	
	Warp and weft reed (1 Set)				Warp and weft reed	
	Auto weft sending				- - -	
	Finish product collection device (1 Set)				- - -	
Machine Size (Packing Means) cm	255 x 112 x 220	210 x 112 x 180	1800 x 112 x 180		180 x 100 x 180	200 x 100 x 180

*612/B8 is the common chain box, also can choose equipped with large chain box 612/B8A configuration.



Website
www.santeksmakine.com



E-Mail Address
info@santeksmakine.com



Call Center
+90 212 556 05 76 pbx

JYG2

Series of crochet machine



JYG2

762/B3 Crochet machine

Model	766/B3	766/B8
Operation space	30" inch (762 mm)	
Weft bars	3	8
Gauge	14 / 15 / 20	15 / 20
Motor	2 HP	
Standard equipment	2HP Inverter choose	2HP Inverter
	2 Sets Rubber feeding device	
	Auto stop motion system	
	Warp and weft reed	
	Finish product collecting device	

JYG

Series of crochet machine



JYG

612/B16 Jacquard Crochet machine



JYG2B - 616/B8 Crochet machine



JYG2B - 616/B3 Crochet machine

Model	616/B3	616/B8	612/B8	612/B11	612/B16
Operation space	24" inch (609 mm) x 2		24" inch (609 mm)		
Weft bars	3	8	8	11	16
Gauge	15 / 20		15 / 20		
Motor	2 HP		1.5 HP		
Standard equipment	---		2 HP Inverter		
	Rubber feeding device		Rubber feeding device (2 Set)		
	Auto stop motion system		Auto stop motion system		
	Warp and weft reed		Warp and weft reed		
	Auto weft sending		---		
Machine Size (Packing Means) cm	Finish product collection device		Finish product collection device		
	---	---	255 x 112 x 220	210 x 112 x 180	180 x 112 x 180



Website
www.santeksmakine.com



E-Mail Address
info@santeksmakine.com



Call Center
+90 212 556 05 76 pbx

T85

Narrow Weave Stacking Machine



The Boosan T-85 is a machine that properly stacks narrow woven products into boxes and packages. It has the feature to be adjusted according to the dimensions of the package. The folding spacing, folding speed and arm speed are adjustable. The package tray descends as it is automatically filled and gives a warning alarm when it is completely full.

It has a low-space occupying portable design, an ergonomic design that does not tire the user, bars that inhibit static build up, and front-back expanders. The stacking spacing setting can be adjusted according to the automatic collection tray or package dimensions.

Capacity	Daily 40.000 meters / 10 hours
Materials	Suitable for full narrow weave products.
Operating Voltage	380 Volt
Power	2 kW
Weight	150 kgs
Dimensions	120 x 140 x 225 (cm)

Head Office



Website
www.santeksmakine.com



E-Mail
info@santeksmakine.com



Machinery Department
+90 555 634 44 09



Spare Part Department
+90 536 639 44 36



Call Center
+90 212 556 05 76 pbx



Fax
+90 212 556 09 01



Address
Sanayi Mah. Atatürk Cad. Çeşme İş Merkezi
No:116/14-16 Güngören - İstanbul / Türkiye

Branch Office (Uzbekistan)



Call Center
+998 71 281 17 52



Fax
+998 71 281 17 52



Mobile
+998 94 686 00 44



Address
Uzbekistan Republic
Tashkent City Chilonzor
Tumani Muqumiy Kochasi 106/18

